

Fuse Inserter/Extractor with Cover Function for 10.3x38 mm Fuses in Clips, Patent Pending



ESO Fuse Inserter/Extractor (part of the delivery)  
 Order required accessories separately

### Description

- Fuse inserter, extractor and cover in one component
- Patented, compact and cost-effective design
- Terminal marking optional possible
- Touch-safe according to IP20
- Captive fuse
- Designed for use with CSO clips only

### Applications

- Photovoltaic applications
- Inverters
- Battery charge controllers
- String fuses
- DC applications


### References

Mating cover to [ASO 10.3x38](#); [CSO](#)

### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#), [Microsite](#), [Video](#)

### Technical Data

|                          |   |                    |                 |
|--------------------------|---|--------------------|-----------------|
| Fuse-Link                | 10.3 x 38 mm  | Contact Resistance | < 5mΩ at 100 mA |
| Mounting                 | Plug-in assembly  |                    |                 |
| Degree of Protection     | IP20  |                    |                 |
| Admissible Ambient Temp. | -40 °C to 85 °C   |                    |                 |
| Climatic Category        | 40/085/21 acc. to IEC 60068-1   |                    |                 |
| Material                 | Thermoplastic black UL 94V-0  |                    |                 |
| Unit Weight              | 9.2 g   |                    |                 |
| Storage Conditions       | 0 °C to 60 °C, max. 70% r.h.  |                    |                 |
| Product Marking          |  Type, Safety Note |                    |                 |


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

### Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: ESO

| Approval Logo   | Certificates                 | Certification Body | Description            |
|---|------------------------------|--------------------|------------------------|
|  | <a href="#">UL Approvals</a> | UL                 | UR File Number: E39328 |

### Product standards

Product standards that are referenced

| Organization | Design                | Standard             | Description                  |
|--------------|-----------------------|----------------------|------------------------------|
|              | Designed according to | UL 4248-1            | Industrial Control Equipment |
|              | Designed according to | CSA C22.2 no. 4248.1 | Industrial Control Equipment |





## Application standards

Application standards where the product can be used


| Organization | Design                         | Standard       | Description   |
|--------------|--------------------------------|----------------|---|
|              | Suitable for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |

## Compliances

The product complies with following Guide Lines

| Identification   | Details  | Initiator   | Description   |
|--|--|-------------|---|
|  | <a href="#">CE declaration of conformity</a>   | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | <a href="#">UKCA declaration of conformity</a> | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.  |
|  | RoHS   | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863  |
|  | China RoHS                                     | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.  |


## Dimension [mm]

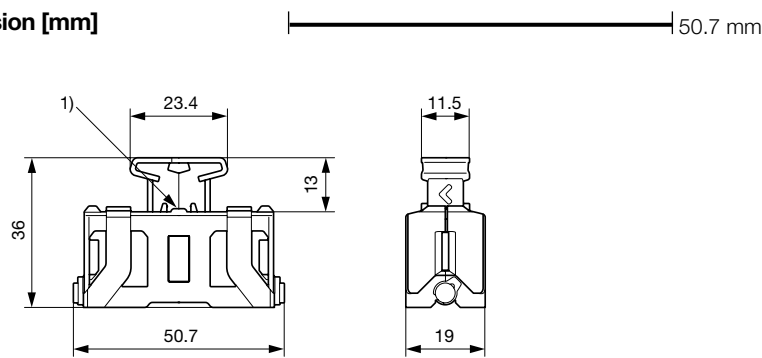

1) Position for optional terminal marking  
 (terminal block width: 5.2 mm, lettering field: 4.6x5.1 mm,  
 e.g. item 0818153 from Phoenix Contact)

## All Variants

| Type        | Packaging       | Order Number |
|-------------|-----------------|--------------|
| ESO 10.3x38 | Bulk (50 pcs.)  | 0853.1250    |
| ESO 10.3x38 | Bulk (500 pcs.) | 0853.1251    |

 Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/info-center/support-tools/stock-check-distributors>

## Required Accessory



### Description

**CSO**  
 Heavy Duty Fuse Clip, 10.3 x 38 / 10.3 x 85 mm, 1500 VAC/VDC, 32 A

|                          |           |
|--------------------------|-----------|
| 10.3 x 38 / 10.3 x 85 mm | 0751.0500 |
| 10.3 x 38 / 10.3 x 85 mm | 0751.0501 |
| 10.3 x 38 / 10.3 x 85 mm | 0751.0502 |
| 10.3 x 38 / 10.3 x 85 mm | 0751.0503 |
| ...                      | ...       |