

Cartridge Fuse, 6.3x32 mm, 500 VAC, 500 VDC 0.5 A-32 A, High Breaking Capacity \geq 1500 A

new



UL 248-14 · 500 VAC · 500 VDC · Quick-Acting F

See below:
[Approvals and Compliances](#)

Description

- 6.3 x 32 mm fuses for primary protection
- 19 rated currents from 0.5 A to 32 A
- Pigtails optional

Unique Selling Proposition

- High rated voltages up to 500 VAC / VDC
- High breaking capacity \geq 1500 A

Applications

- 3-phase applications
- DC applications
- Power supplies
- Frequency converter
- Power electronics


References

Pigtail Type [SHF 6.3x32 Pigtail](#); 8020.5078.G

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

| | |
|--------------------------|--|
| Rated Voltage | 500VAC, 500VDC |
| Rated current | 0.5 - 32A |
| Breaking Capacity | 1500A - 50kA |
| Characteristic | Quick-Acting F |
| Mounting | Fuseholder / Clip |
| Admissible Ambient Temp. | -40 °C to 85 °C |
| Climatic Category | 40/085/21 acc. to IEC 60068-1 |
| Material: Tube | Ceramics |
| Material: Endcaps | Nickel-Plated Copper Alloy |
| Material: Axial Leads | Tin-Plated Copper |
| Unit Weight | 2.84 g |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |
| Product Marking |  Type, Rated current, Rated Voltage, Characteristic, Breaking capacity, Approvals |

Approvals and Compliances


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals



The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: SHF 6.3x32

| Approval Logo | Certificates | Certification Body | Description |
|---|------------------------------|--------------------|------------------------|
|  | UL Approvals | UL | UR File Number: E41599 |

Product standards

Product standards that are referenced

| Organization | Design | Standard | Description |
|--|-----------------------|--------------------|---|
|  | Designed according to | UL 248-14 | Low voltage fuses - Part 14: Supplemental fuses |
|  | Designed according to | CSA22.2 No. 248.14 | Low-Voltage Fuses - Part 14: Supplemental Fuses |






Application standards


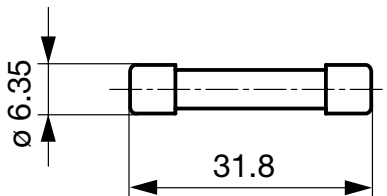
Application standards where the product can be used

| Organization | Design | Standard | Description |
|--|--------------------------------|----------------|---|
|  | Suitable for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |

Compliances

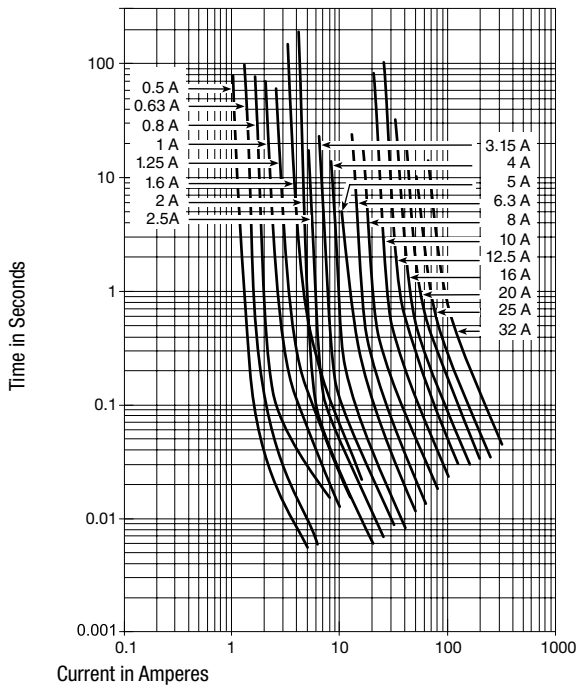
The product complies with following Guide Lines

| Identification | Details | Initiator | Description |
|---|--|-------------|---|
|  | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | UKCA declaration of conformity | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008. |
|  | RoHS | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863 |
|  | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS. |
|  | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |

Dimension [mm]
 6.3 mm
**Pre-Arcing Time**


| Rated Current In | 1.0 x In min. | 1.5 x In min. | 2.1 x In max. | 2.75 x In min. | 2.75 x In max. | 4.0 x In min. | 4.0 x In max. | 10.0 x In min. | 10.0 x In max. |
|------------------|---------------|---------------|---------------|----------------|----------------|---------------|---------------|----------------|----------------|
| 0.5 A - 0.8 A | | 60 min | 30 min | 20 ms | 1.5 s | 8 ms | 400 ms | - | 20 ms |
| 1 A - 8 A | | 60 min | 30 min | 20 ms | 5 s | 8 ms | 1 s | - | 50 ms |
| 10 A - 32 A | 240 min | | 30 min | 100 ms | 5 s | 20 ms | 1 s | - | 50 ms |

Time-Current-Curves



All Variants

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I _n max. [mV] | Power Dissipation 1.5 I _n max. [mW] | Melting I ² t 10.0 I _n typ. [A ² s] | Order Number |
|-------------------|---------------------|---------------------|-------------------|---|--|--|--------------|
| 0.5 | 500 | 500 | 1) | 1400 | 2500 | 0.14 | 8020.5065 |
| 0.5 | 500 | 500 | 1) | 1400 | 2500 | 0.14 | 8020.5065.G |
| 0.63 | 500 | 500 | 1) | 1300 | 2500 | 0.23 | 8020.5066 |
| 0.63 | 500 | 500 | 1) | 1300 | 2500 | 0.23 | 8020.5066.G |
| 0.8 | 500 | 500 | 1) | 600 | 2500 | 0.98 | 8020.5067 |
| 0.8 | 500 | 500 | 1) | 600 | 2500 | 0.98 | 8020.5067.G |
| 1 | 500 | 500 | 2) | 400 | 1200 | 1.5 | 8020.5068 |
| 1 | 500 | 500 | 2) | 400 | 1200 | 1.5 | 8020.5068.G |
| 1.25 | 500 | 500 | 2) | 300 | 1300 | 2.9 | 8020.5069 |
| 1.25 | 500 | 500 | 2) | 300 | 1300 | 2.9 | 8020.5069.G |
| 1.6 | 500 | 500 | 2) | 300 | 1400 | 5.8 | 8020.5070 |
| 1.6 | 500 | 500 | 2) | 300 | 1400 | 5.8 | 8020.5070.G |
| 2 | 500 | 400 | 3) | 280 | 1700 | 2 | 8020.5071 |
| 2 | 500 | 400 | 3) | 280 | 1700 | 2 | 8020.5071.G |
| 2.5 | 500 | 400 | 3) | 260 | 2000 | 3.8 | 8020.5072 |
| 2.5 | 500 | 400 | 3) | 260 | 2000 | 3.8 | 8020.5072.G |
| 3.15 | 500 | 400 | 3) | 240 | 2300 | 8.6 | 8020.5073 |
| 3.15 | 500 | 400 | 3) | 240 | 2300 | 8.6 | 8020.5073.G |
| 4 | 500 | 400 | 3) | 220 | 2900 | 14.6 | 8020.5074 |
| 4 | 500 | 400 | 3) | 220 | 2900 | 14.6 | 8020.5074.G |
| 5 | 500 | 400 | 3) | 190 | 2900 | 33.2 | 8020.5075 |
| 5 | 500 | 400 | 3) | 190 | 2900 | 33.2 | 8020.5075.G |
| 6.3 | 500 | 400 | 3) | 170 | 3400 | 61.6 | 8020.5076 |
| 6.3 | 500 | 400 | 3) | 170 | 3400 | 61.6 | 8020.5076.G |
| 8 | 500 | 400 | 3) | 160 | 3700 | 120 | 8020.5077 |
| 8 | 500 | 400 | 3) | 160 | 3700 | 120 | 8020.5077.G |
| 10 | 500 | 400 | 3) | 150 | 4500 | 220 | 8020.5078 |
| 10 | 500 | 400 | 3) | 150 | 4500 | 220 | 8020.5078.G |

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I _n max. [mV] | Power Dissipation 1.5 I _n max. [mW] | Melting Pt 10.0 I _n typ. [A ² s] |  | Order Number |
|-------------------|---------------------|---------------------|-------------------|---|--|--|---|--------------|
| 12.5 | 500 | 400 | 3) | 140 | 5500 | 480 | ● | 8020.5079 |
| 12.5 | 500 | 400 | 3) | 140 | 5500 | 480 | ● | 8020.5079.G |
| 16 | 500 | 400 | 3) | 130 | 6800 | 760 | ● | 8020.5080 |
| 16 | 500 | 400 | 3) | 130 | 6800 | 760 | ● | 8020.5080.G |
| 20 | 440 | 63 | 4) | 130 | 9500 | 1350 | ● | 8020.5081 |
| 20 | 440 | 63 | 4) | 130 | 9500 | 1350 | ● | 8020.5081.G |
| 25 | 440 | 63 | 4) | 120 | 13000 | 2150 | ● | 8020.5082 |
| 25 | 440 | 63 | 4) | 120 | 13000 | 2150 | ● | 8020.5082.G |
| 32 | 440 | 63 | 4) | 120 | 16000 | 4750 | ● | 8020.5083 |
| 32 | 440 | 63 | 4) | 120 | 16000 | 4750 | ● | 8020.5083.G |

 Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/info-center/support-tools/stock-check-distributors>

- 1) 50 kA @ 500 VAC, cos φ = 0.3 - 0.4
1500 A @ 500 VAC, cos φ = 0.99 - 1
1500 A @ 250 VAC, cos φ = 0.7 - 0.8
10 kA @ 125 VAC, cos φ = 0.7 - 0.8
1500 A @ 500 VDC
20 kA @ 63 VDC
- 2) 1500 A @ 500 VAC, cos φ = 0.99 - 1
1500 A @ 250 VAC, cos φ = 0.7 - 0.8
10 kA @ 125 VAC, cos φ = 0.7 - 0.8
1500 A @ 500 VDC
20 kA @ 63 VDC
- 3) 1500 A @ 500 VAC, cos φ = 0.99 - 1
1500 A @ 250 VAC, cos φ = 0.7 - 0.8
10 kA @ 125 VAC, cos φ = 0.7 - 0.8
1500 A @ 400 VDC
20 kA @ 63 VDC
- 4) 1500 A @ 440 VAC, cos φ = 0.99 - 1
1500 A @ 250 VAC, cos φ = 0.7 - 0.8
10 kA @ 125 VAC, cos φ = 0.7 - 0.8
20 kA @ 63 VDC

| Packaging Unit | xxxx.xxxx xxxx.xxxx.G | Small Box Pack (10 pcs.) Bulk (1000 pcs.) |
|----------------|--------------------------|--|
|----------------|--------------------------|--|