



- NOTES:**
1. ITO GLASS THICKNESS : 157mm
 2. ITO PET CIRCUIT THICKNESS : 0.2mm
 3. SPACER ADHESIVE : 0.1mm
 4. OVERALL THICKNESS : 187mm \pm 0.07
 5. CONNECTOR AND PINOUT AS INDICATED
 6. FRONT SURFACE ANTIGLARE HARDCOAT
 7. OPTICAL SPECIFICATION : A001
 8. LAYER TD LAYER ASSEMBLY TOLERANCE: \pm 0.5mm

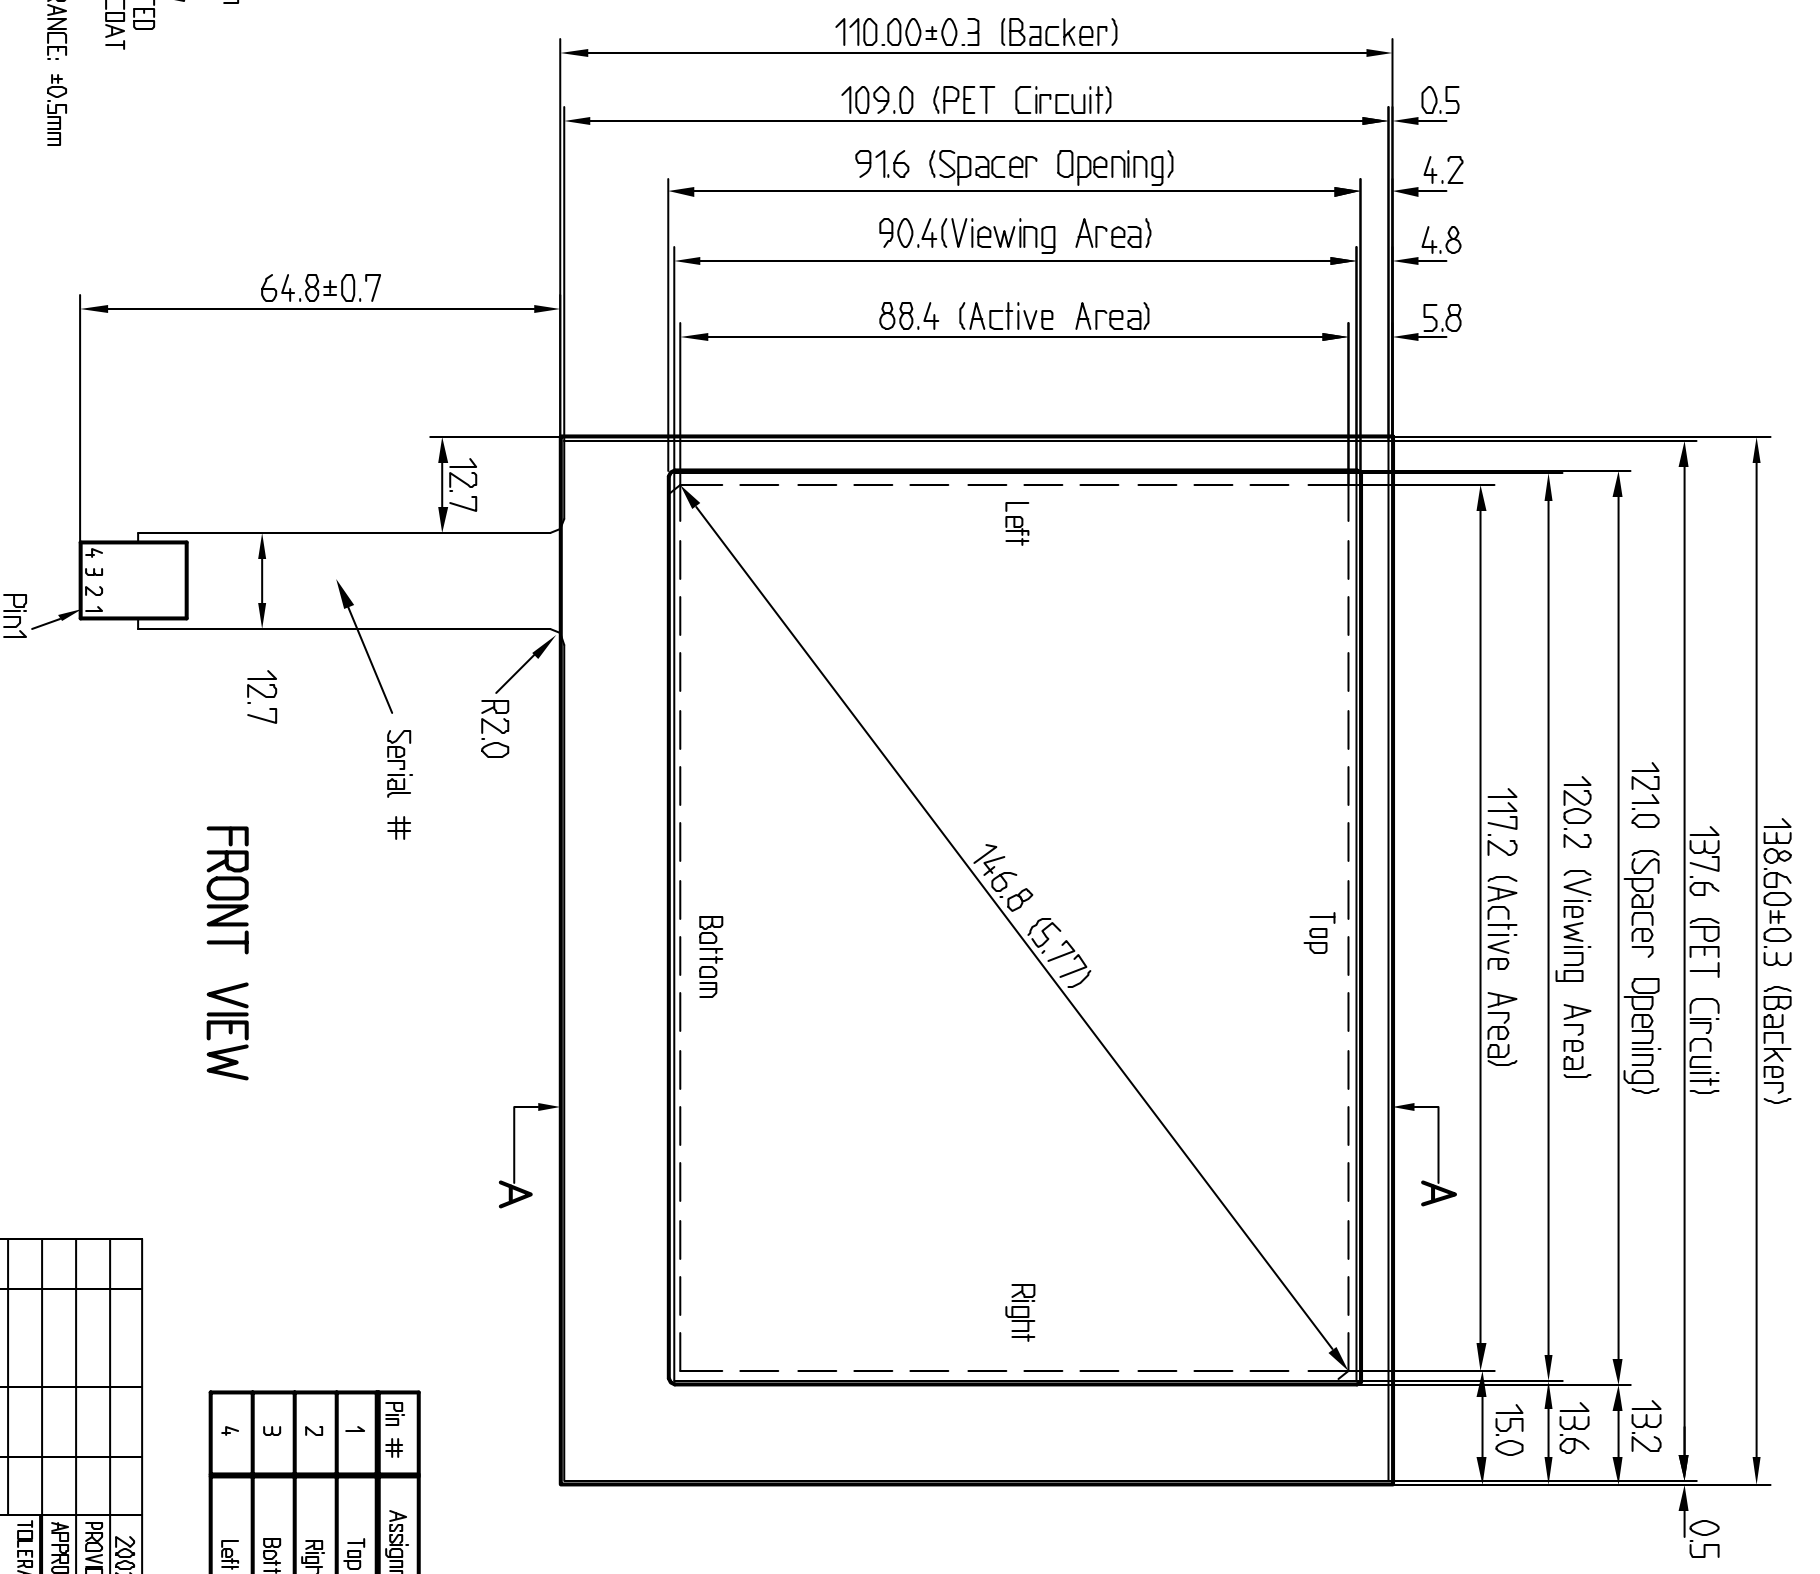

FRONT VIEW

Pin #	Assignment
1	Top
2	Right
3	Bottom
4	Left

SECTION A-A

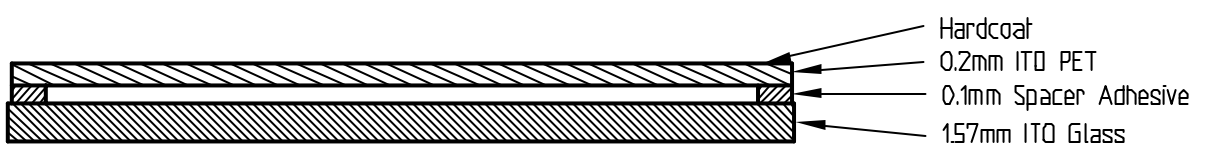

REV.	MODIFIKAT.	DATE	NAME	ARTICLEL
				TOUCH 5,77" 4 WIRE
		2002	DATE	NAME
		PROVIDER	23.10.	Hilt
		APPROVED	23.10.	Maurer
TOLERANCES UNLESS SPECIFIED				
		X =	\pm 0.5	SCALE
		XX =	\pm 0.25	UNIT
		XXX =	\pm 0.10	mm
AMT-DWG-NO. 9503-1-01 / REV. A				
Manufactured by Apex Material Technology GmbH				
SCHURTER-ORDER-NO. 1070.0417				
D-79346 Endingen				
SHEET 1 OF 1				
REV -				