



# FRONT VIEW

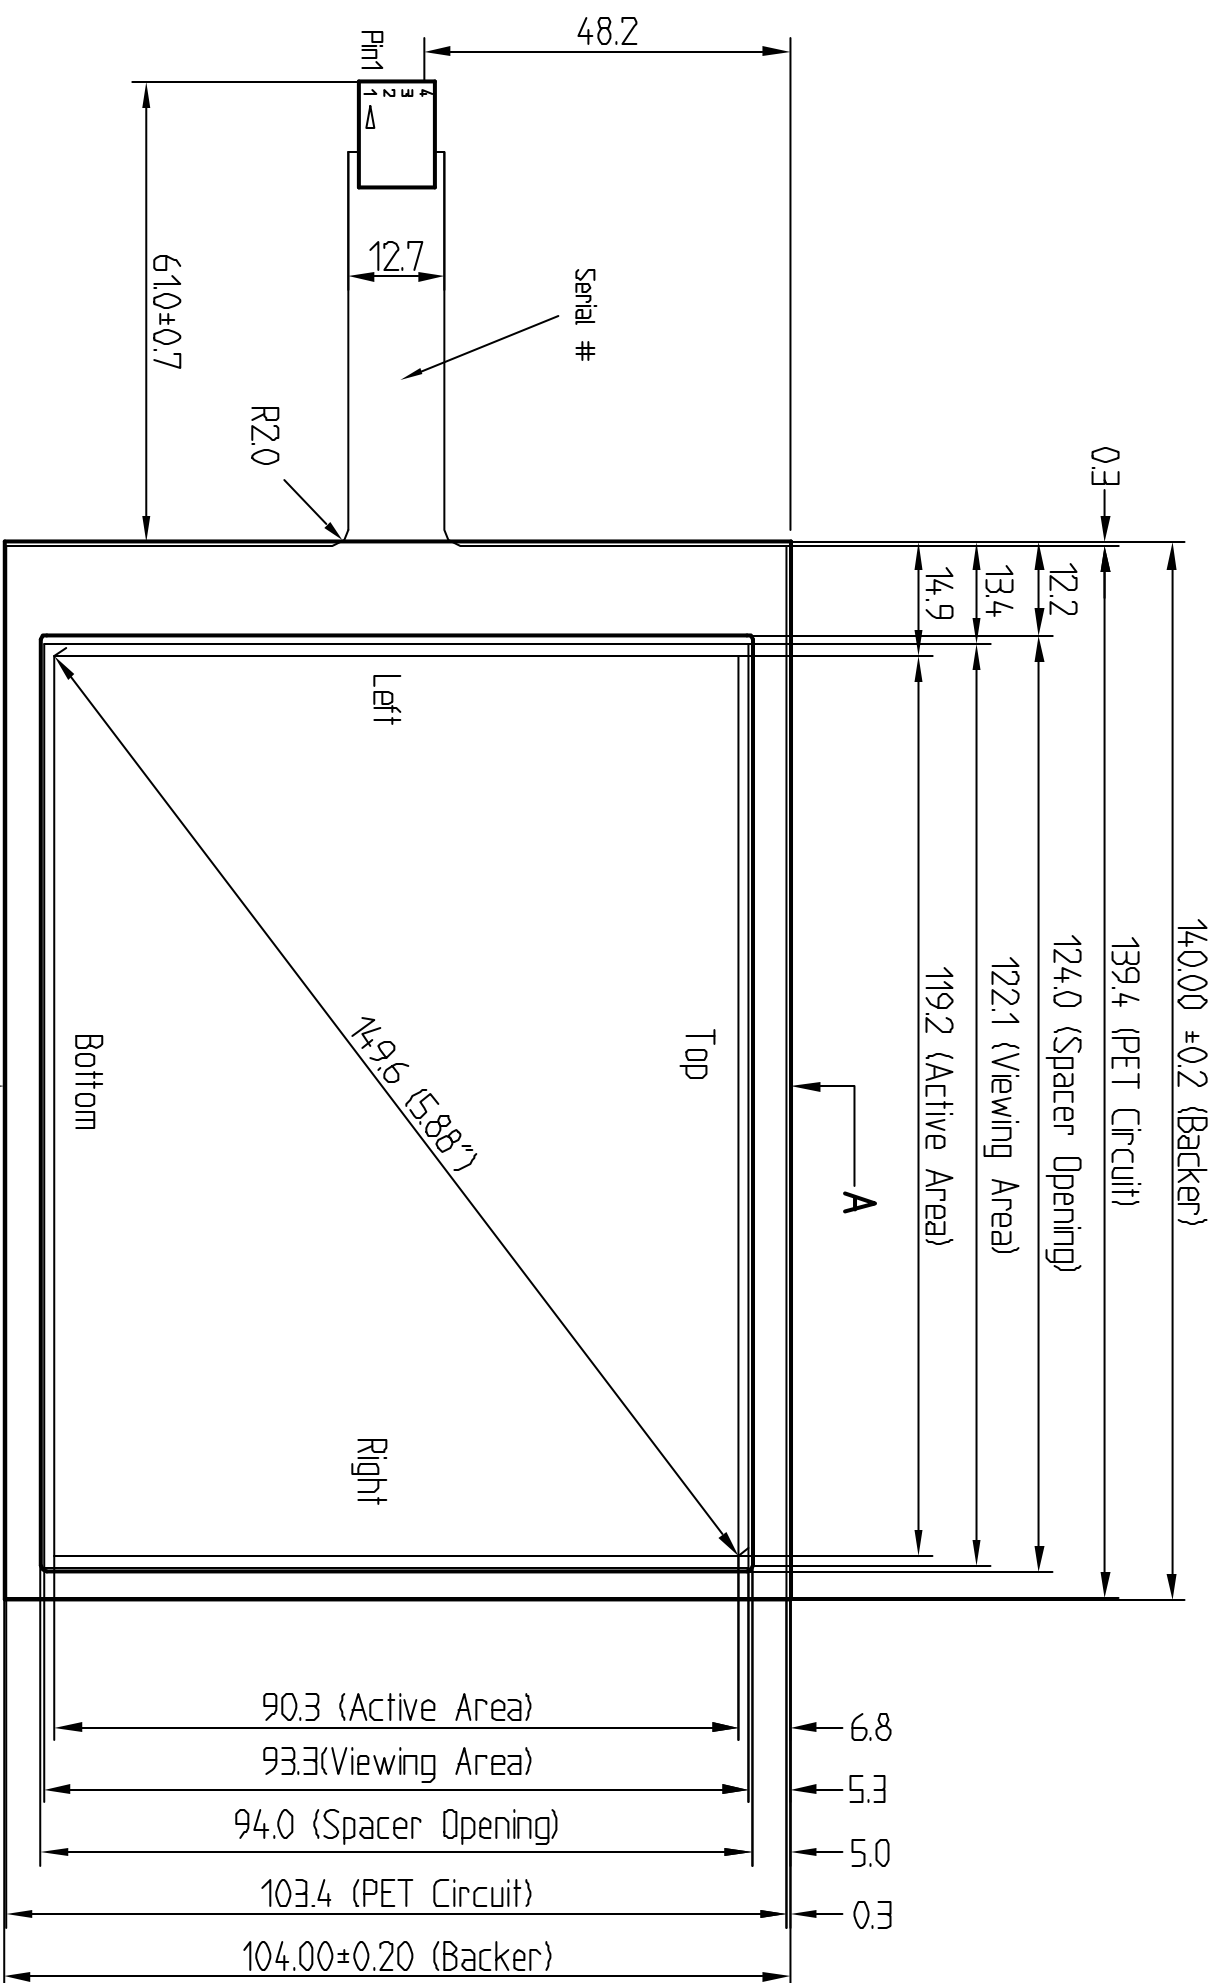

SECTION A-A

- Hardcoat
- 0.2mm ITO PET
- 0.1mm Spacer Adhesive
- 1.1mm ITO Glass



## NOTES:

1. ITO GLASS THICKNESS : 1.1mm
2. ITO PET TOP CIRCUIT THICKNESS : 0.2mm
3. SPACER ADHESIVE : 0.1mm
4. OVERALL THICKNESS : 1.40mm ± 0.07
5. CONNECTOR AND PINOUT AS INDICATED
6. FRONT SURFACE ANTIGLARE HARDCOAT
7. OPTICAL SPECIFICATION : A001
8. LAYER TO LAYER ASSEMBLY TOLERANCE: ± 0.3mm

Pin #	Assignment
1	Right
2	Left
3	Bottom
4	Top

REV.	MODIFIKAT.	DATE	NAME	2002	DATE	NAME	ARTICLEL	
				PROVIDER	23.10.	Hilt	TOUCH 5,88" 4 WIRE	
				APPROVED	23.10.	Maurer		
TOLERANCES UNLESS SPECIFIED								
X = ±0.5							SCALE	1 : 1
XX = ±0.25							UNIT	mm
XXX = ±0.10							Manufactured by Apex Material Technology GmbH	
D-79346 Endlingen							SCHURTER-ORDER-NR.	1070.0419
							SHEET	1 OF 1
							REV	-