

Fuseholder Open Design, Holder for MSB and 172876, SMD



125 VAC/DC · 0.9 W (UL/CSA)

**Standards**

- UL 4248-1 / UL 512
- CSA C22.2 no. 39

Approvals

- UL File Number: E41738
- CSA File Number: 23151


References

[Packaging Details](#)



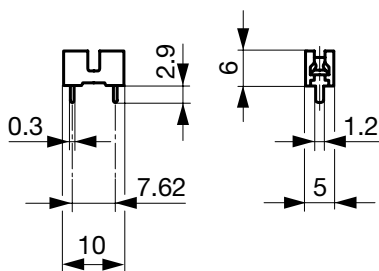
Weblinks

[pdf](#), [html](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

Fuse-Link	2 x 7 mm
Mounting	PCB
Terminal	Solder THT
Rated Voltage	125VAC/DC
Rated Power Acceptance IEC	0.9W @ Ta 23°C
Degree of Protection	IP 00
Admissible Ambient Air Temp.	-40°C to 85°C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoplastic, black, UL 94V-0
Material: Terminals	Tin-Plated Bronze
Unit Weight (Socket/Cap)	0.45 g
Storage Conditions	0°C to 60°C, max. 70% r.h.
Product Marking	 Approvals

Soldering Methods	Wave
Solderability	235°C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260°C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A

Abmessungen
 10 mm


Drilling diagram

Variants

Holder	Order Number
●	7090.9020.xx

Packaging Unit

- .xx = .03 Plastic Bag (100 pcs.)
- .xx = .55 Blister Tape (500 pcs.)