

Caps for Holder FEU (Grip)



250 VAC · 20 A (UL/CSA)

**Standards**

- IEC 60127-6
- UL 4248-1 / UL 512
- CSA C22.2 no. 39

Approvals

- VDE Certificate Number: 134125
- UL File Number: E39328

References

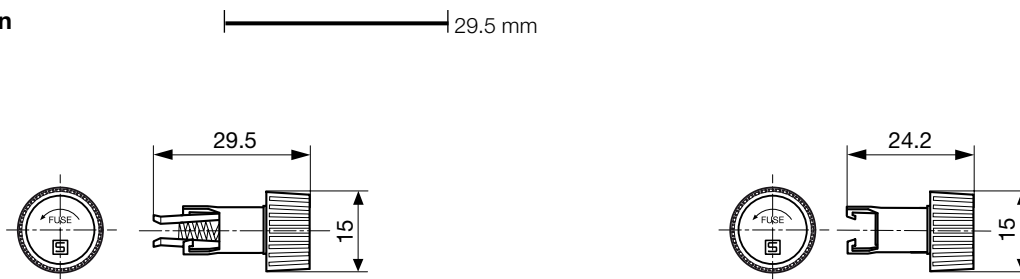
Fits to type: FEU (Grip)

Weblinks

[pdf](#), [html](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data

| | |
|------------------------------|------------------------------|
| Fuse-Link | 5 x 20 or 6.3 x 32 mm |
| Rated Voltage | 250 VAC |
| Rated Current | 10 A (VDE), 20 A (UL/CSA) |
| Degree of Protection | IP 40 |
| Admissible Ambient Air Temp. | -40 °C to 85 °C |
| Material: Cap | Thermoset |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |

Abmessungen**Variants**

| Cap | Fuse-Link | Degree of Protection | Order Number |
|------------|------------|----------------------|--------------|
| Fingergrip | 6.3 x 32mm | IP 40 | 0031.1812 |
| Fingergrip | 5 x 20mm | IP 40 | 0031.1811 |

Packaging Unit

Plastic Bag (100 pcs.)